

Breathable 3mm XPS Extruded Polystyrene Underlay for Floor Heating

Lightweight breathable, 3mm foam Underlay, designed specifically for use with warm water floor heating systems.

3mm slatted, foam underlay. Designed for use with engineered and solid wood flooring. Installing new underlay dramatically improves the performance of new wood or laminate flooring and Improves walking comfort and reduces associated noise.


This is a 3mm quality foam underlay for solid & laminate floors if you are laying your floor on a relatively new concrete floor we would advise you use a dpm.

SPECIFICATIONS

1

3mm foam Underlay with cut outs for floating wood floors

- Water absorption (28 days) $\leq 3\%$
- Floor alignment $\leq 3\text{mm}$
- Acoustic isolation (raw material) up to 18 dB
- Temperature Resistance (48C/48 h) $\leq 0.85\%$
- Estimated R parameter is 0,056 m²K/W
- Weight 5m² = 0.420 g (+/-5%)
- 95m² = 2-8 kg (+/-5%)
- Dimensions 1000mm x 500mm x 3mm

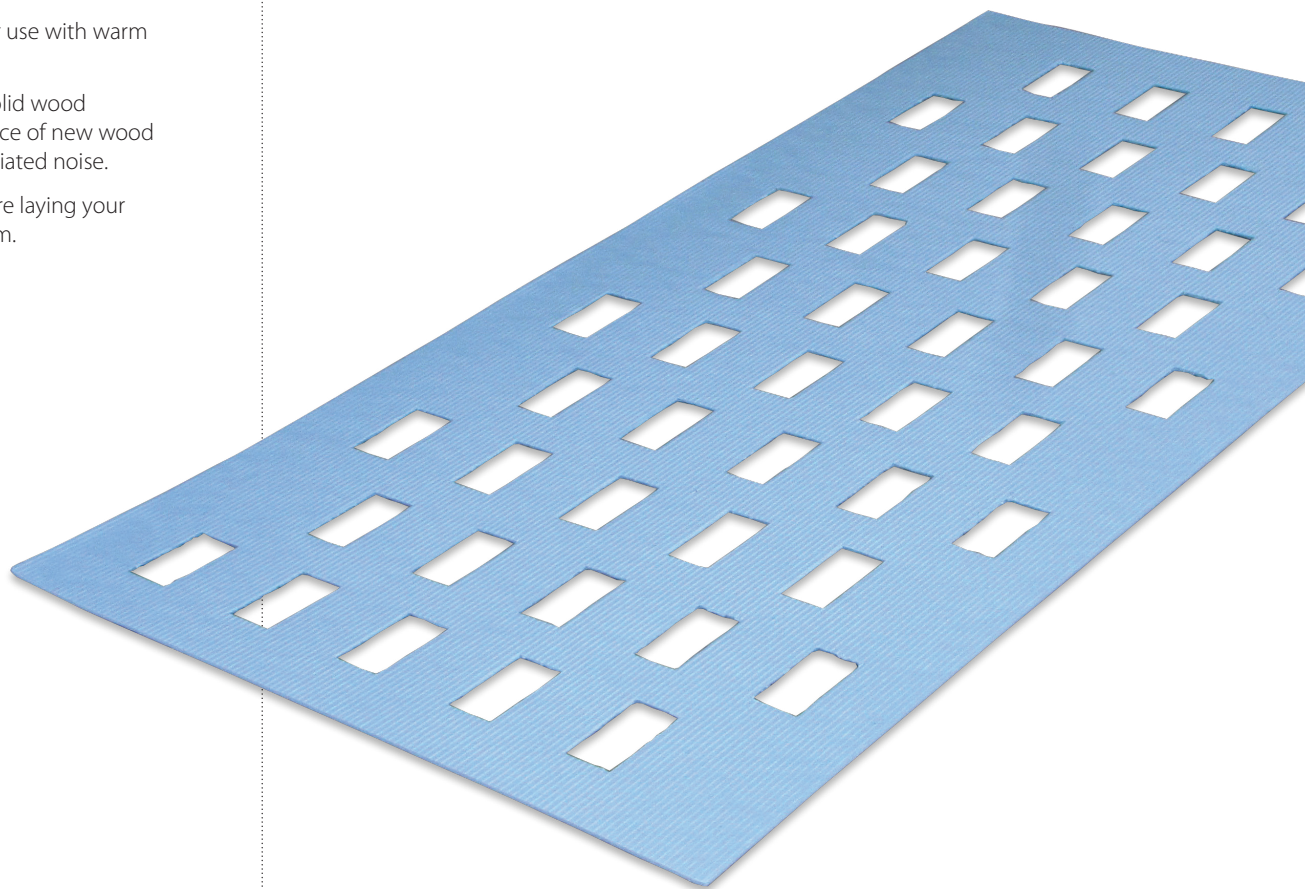

Your Notes:

2

Tech support opening hours are subject to change - please visit our website for the latest information